

Repair instructions

C402X Float box



Press the flush button to empty the water tank



Pull the handle off




Remove the control panel



Pull out the control well



Go inside the water tank and

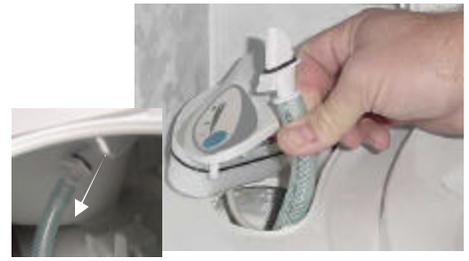


Disconnect the nozzle by pulling it (inside the toilet) down.



Take complete pump and flush tube out the water tank




Take the float box out

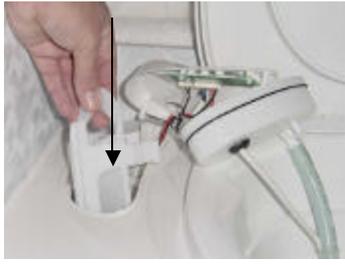

Take the new float box and go back in the water tank

Inside view position float box

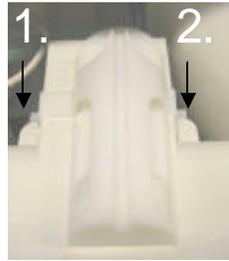

Push float box completely down, between the two ribs.



Place the pump and flush tube back in the inside of the water tank



Push the nozzle back into the toilet- bowl, (inside the toilet, you have to hear a click when pressing the nozzle in)



Push the control well back on its place



Place the control panel back



Press the handle back onto the control panel