


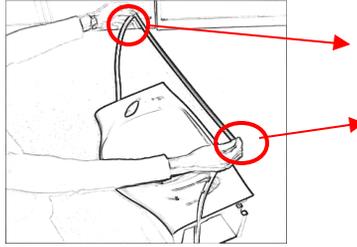


32311 SC400 Wall seal

Before putting on the wall seal take off a small length of the protection sheet at both corners of the tape at the back side of the wall seal. ($\pm 25\text{mm}$)





Start applying the seal first at both corners of the toilet. Then divide the remaining length along the back.




Apply seal at both sides.

Note: make sure that left and right side are well attached.

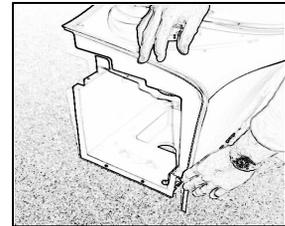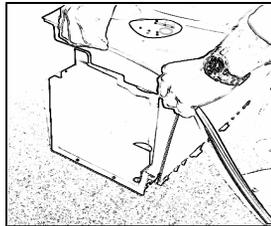



Start removing the protection sheet off the tape at the back side of the toilet.

Note: Support the seal while removing, to ensure it's positioned well before the tape fixates to the toilet.

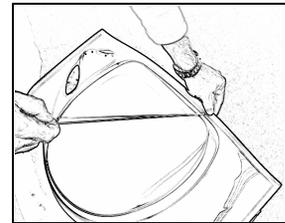

Remove the protection sheet off the tape at the left & right side of the toilet. For the sides, start removing the sheet at the free hanging end of the seal at the bottom.

Note: support the seal while removing the sheet, to ensure it's positioned well before the tape fixates to the toilet. When all protection sheet is removed, press the wall seal again firmly with your hands on the toilet.

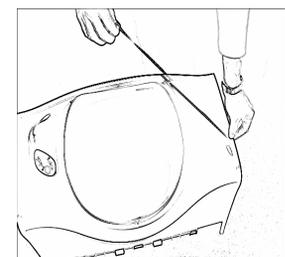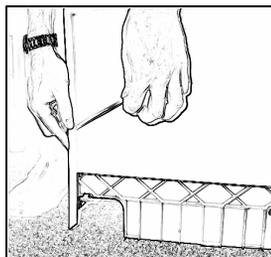

Finally, cut the seal at length

